

1. GENERAL INFORMATION

1.1 Dealer Information


1.3 Project

STANDARD FEATURES


Hydraulic 2:1 roped full 2-stop elevator package, 950lbs capacity, variable speed valve, submersed motor, automatic LED cab lighting, automatic emergency cab lowering, full automatic functionality, illuminated stainless steel car operator panel with phone and DPI, illuminated stainless steel call stations with DPI, 4 LED pot lights, solid stainless steel handrail.

2. BASICS

2.1 FINISHED HOISTWAY DIMENSIONS

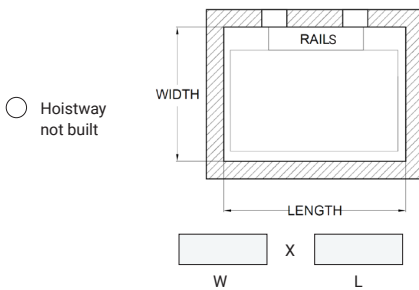

2.2 RAIL LOCATION



**When facing CAB at bottom landing*

2.3 LANDINGS

☐ 2

☐ 3

☐ 4

HOISTWAY CONSTRUCTION

☐ Wood

☐ Concrete

2.4. CAB DIMENSIONS

Standard:

30 - 42" W x 36 - 48" L

x
width length

Custom:*

x
width length
(44" max) (60" max)

**total custom dimensions cannot exceed 15 sq ft.*

2.5 CAB CONFIGURATION

☐ Front Opening

☐ Pass Through (2 Gates)

☐ 90 Degrees (2 Gates)

2.6 CAB HEIGHT & OVERHEAD REQUIREMENTS

CAB HEIGHT

☐ 7' (84")

OVERHEAD REQUIREMENTS

☐ 8' (96")

☐ 8'7" (104")

CAB GATE

CAB AUTO DOORS

2.7 MACHINE ROOM ADJACENT (15ft)

☐ Yes

☐ No

Distance

2.8 CAB FINISHES



☐ Eclipse



☐ Frisquet



☐ Dorato Grey



☐ Classic Chocolate



☐ Otter Grey



☐ Shipsaw



☐ Serenity



☐ Etrusco



☐ Charcoal



☐ Sheer Linen



☐ Unfinished MDF




☐ Acrylic




☐ Glass


2.9 GATE FINISHES

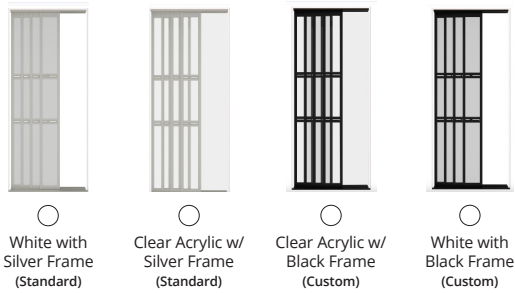


2-speed and 3-speed doors are available in both stainless and in glass.

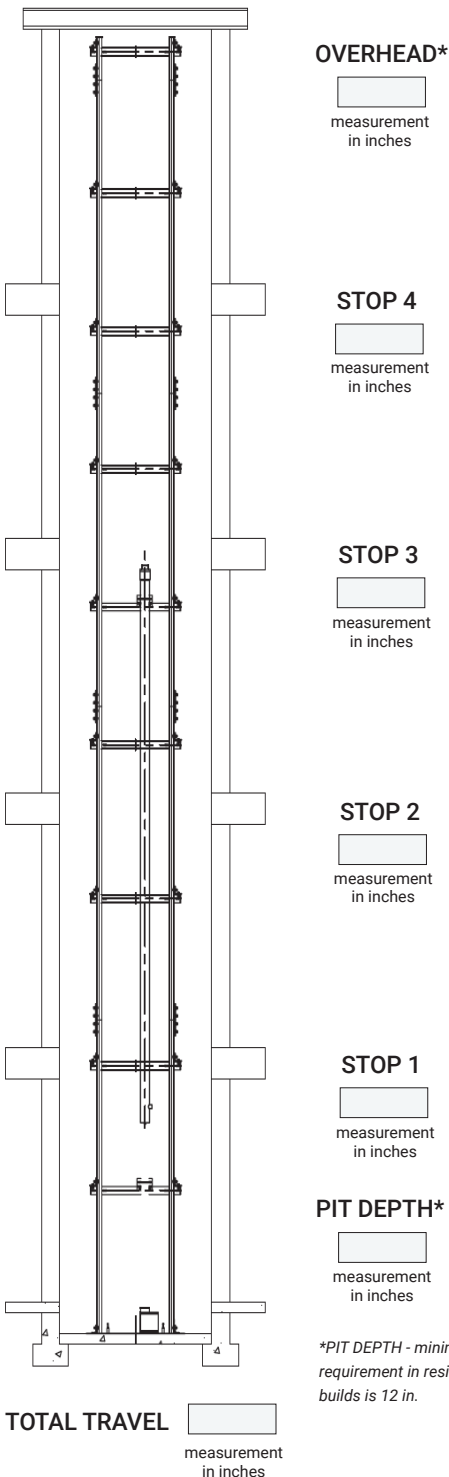


OVERHEAD*




STOP 4




STOP 3




STOP 2



STOP 1



PIT DEPTH*



*PIT DEPTH - minimum depth requirement in residential builds is 12 in.

IMPORTANT

OVERHEAD: The distance from the finished floor to the top of the hoistway to the top landing. Minimum overhead requirement in residential builds is 96 in. Some door models require 104 in.

PIT DEPTH: Minimum depth requirement in residential builds is 12 in.

2.10 CAB DOORS

- ☐ Manual 4Panel Gate (select finish on previous page) - **Standard**
- ☐ Automatic 4Panel Gate (select finish on previous page)
- ☐ 2-Speed Full Automatic SS (requires a min 42" wide platform)

NOTE: SS DENOTES STAINLESS STEEL


2.11 LANDING DOORS

- ☐ Locks Only - Door by Others - **Standard**
- ☐ 36" Wooden Door Jambs
- ☐ 2-Speed Full Automatic SS (requires a min 42" wide platform)

NOTE: 2-SPEED AND 3-SPEED MUST MATCH CAB DOORS

2.12 LANDING DOOR SWINGS

- | | | |
|--------|----------------------------------|---------------------------------|
| Stop 4 | ☐ Right Hand | ☐ Left Hand |
| Stop 3 | ☐ Right Hand | ☐ Left Hand |
| Stop 2 | ☐ Right Hand | ☐ Left Hand |
| Stop 1 | ☐ Right Hand | ☐ Left Hand |

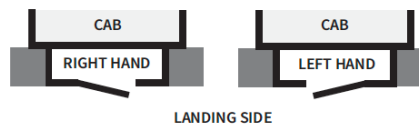

2.13 LANDING DOOR LOCATION

- | | | | | |
|--------|-------------------------|-------------------------|-------------------------|-------------------------|
| Stop 4 | ☐ A | ☐ B | ☐ C | ☐ D |
| Stop 3 | ☐ A | ☐ B | ☐ C | ☐ D |
| Stop 2 | ☐ A | ☐ B | ☐ C | ☐ D |
| Stop 1 | ☐ A | ☐ B | ☐ C | ☐ D |

